


FEATURES

- 4-Way Bill Acceptance
- New Generation Design of Verification System
- Optimized Sensor Technologies
- Brand New Design of Anti-Stringing Efficiency
- Bill-Jam Free Function
- Lockable Cashbox
- Selectable Interfaces (USB;RS232)
- Automatic Sensor Calibration
- Quick to Update Software (flash ROM)
- Easy Installation and Easy Maintenance.

DIMENSIONAL

TAO

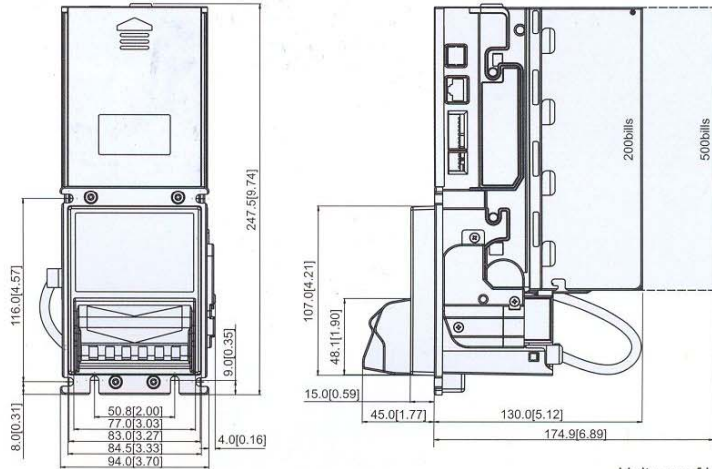


Unit : mm [inch]


DIRECTIONS




- Lockable cashbox.

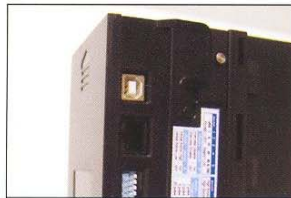

- Selectable interfaces. (USB;RS232)

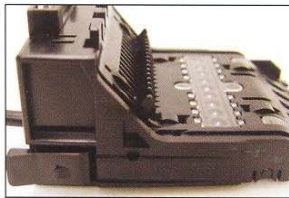

- Brand new design of anti-stringing technologies.

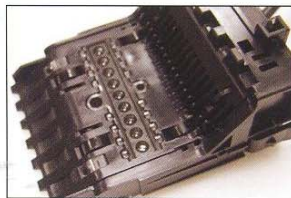

- New generation design of verification system.

SPECIFICATIONS

Acceptance Rate

96% or greater

Interface

TAO-A: S.T.D. Pulse, 5V ENABLE
ICT Protocol, NISR
USB (Reserved)

TAO-V: MDB. Pulse, ICT Protocol,
USB (Reserved)

Bill Capacity

Approx. 200 bills (230~250)
Approx. 500 bills (480~530)

Operation Environment

Operation Temperature: 0°C~55°C
Storage Temperature: -30°C~70°C
Humidity: 30%~85%RH(no condensation)

Bill Insertion

4-way acceptance

Power Source

TAO-A: 12V DC ±10%
117V AC ±10%
TAO-V: 34V DC ±10%

Identification Time

Approx. 3 seconds
(From bill insert to stack.)


Power Consumption

50 watts maximum

Weight

Approx. 200 bills....Approx. 1.22kg
Approx. 500 bills....Approx. 1.35kg

MODEL NUMBER DETAIL

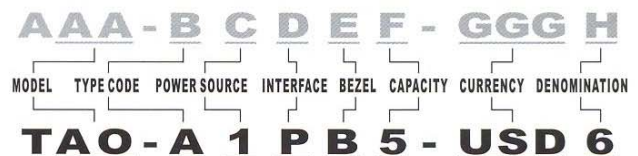

International Currency Technologies

TEL : 886-2-2797-1238 (30 LINE) FAX : 886-2-2797-1634
E-mail : sales@ictgroup.com.tw Website : www.ictgroup.com.tw